

POS X

POINT OF SALE
PERFECTED

XPC500 SERIES

PERFORMANCE ALL-IN-ONE TOUCHPC

You shouldn't have to pay too much to get top of the line performance. The XPC500 Series TouchPC combines the raw power and small footprint you need with the reliability and value you expect. With its stable Intel-based chipset, splash-resistant touchscreen and industrial grade housing, the XPC500 is truly the "Best of Both Worlds". Perfect for any hospitality/retail environment or any location requiring a comprehensive solution, the XPC500 is in a class of its own.



KEY FEATURES


- CPU: Intel 2.8GHz Celeron ~ 3.0GHz Pentium D
- Memory: 512MB DDR II RAM upgradable to 2GB
- Optional integrated MSR and Customer Display
- Rugged spill resistant metal housing
- Bump-free 90-degree tilting base
- Stable Intel chipset
- 3 year warranty



ALL-IN-ONE TOUCHPC

XPC500 Series Specifications

PART NUMBER	XPC500, XPC500-H, XPC500-P	XPC500-H1 XPC500-P1	XPC500-H2 XPC500-P2	XPC500-P1P XPC500-P2P
MOTHERBOARD	PM945GZ(V2.0)			PM945GZ(V2.0)
CPU	2.8 GHz Celeron			3.0 GHz Pentium D
Chip Set	Northbridge Intel® 945GZ		Southbridge Intel® ICH7	FSB 800/533 MHz
System Memory	512MB DDR II 533MHz	1GB DDR II 533 MHz	2GB DDR II 533 MHz	2GB DDR II 533 MHz
Video	Integrated Intel® GMA® 950 Graphics Engine			
Audio	Realtek® ALC880			
PORTS				
USB	4 x USB2			
Serial	3 x RS232 optional configurable powered 5V/12Vby Jumper D-Sub 9 Pin Male			
Parallel	Supports SPP/ECP/EPP mode D-sub 25-pins Female			
LAN	1 Realtek RTL8100C 10/100 Mb/s LAN			
Mouse	1 x PS/2			
Keyboard	1 x PS/2			
Audio	1 x Line-in/ Line-out/ MIC-in/ Center-LFT/ Surback/ Surround 3.5mm Audio-Jack			
HARD DRIVE	1 x 3.5" 80 GB			
PHYSICAL				
Housing	Metal Housing, ABS Bezel			
Weight with Base	19 lbs			
Dimensions with Base	15" (W) x 10.0" (D) x 12.25" (H)			
Dimensions without Base	15" (W) x 4" (D) x 12" (H)			
Tilt Angle	0° to 90°			
Optional Mounting	VESA 75 x 75 mm			
Housing Color	Black			
LCD Display	15" 1024 x 768 pixel, 16.7M colors 250 nit			
Touch Screen	5-Wire Resistive, 35+ millions taps per location			
ELECTRICAL	200W			
ENVIROMENTAL				
Temperature	32°F to 114°F operating			
Humidity	10% - 95% non-condensing			
Shock Resistance	Operating shock 5g			
WARRANTY	3 Year Limited			
CERTIFICATIONS	FCC Class A, CE, RoHs			
OPERATING SYSTEM	None/ WIN 2000/WIN 2000 Professional/XP Embedded/XP Home/XP Professional/VISTA			

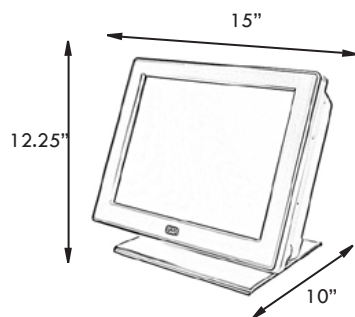

ACCESSORIES	
XM130U	3 Track MSR with USB interface
XM130K	3 Track MSR with KBW interface
XP2200S	Integrated Customer Display